





P1

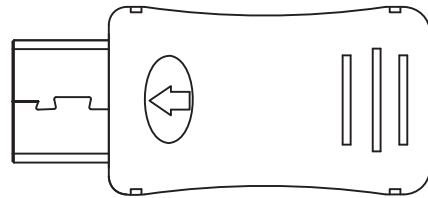

6.9±0.05

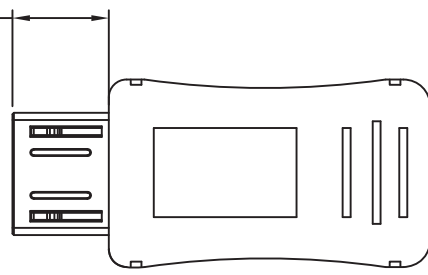

P2



ELECTRICAL TEST:


- 1.100% OPEN & SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE:1 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms

Pin Assignment

P1	P2
1	1
2	2
3	3
5	5
Shell	Shell


		TOLERANCE				2Direct GmbH	
		INCHES	M/M			TITLE:	
		.X	.015			Micro USB TO Mini USB 5P Adapter	
		.XX	.010			CUSTOMER :	
		.XXX	.005			CUSTOMER NO.: AU0010	
				CHECK BY	SCALE	NONE	DRAWING NO.: CA0010257
				APPD BY	UNIT	MM	
				DATE		2010.12.02	REV. A
							1/2

NO	ITEM	DESCRIPTION	Q'TY	UNIT
4	Cover	Micro to Mini ABS Cover	1	set
3	Shell	Mini USB 5P Female Solder Type, Ni Plated, Black Insulation	1	pcs
2	Connector	Micro USB(B) 5P Male Solder Type, Ni Plated, Black Insulation	1	pcs
1	Cable	28AWG BLACK L=20MM	4	pcs

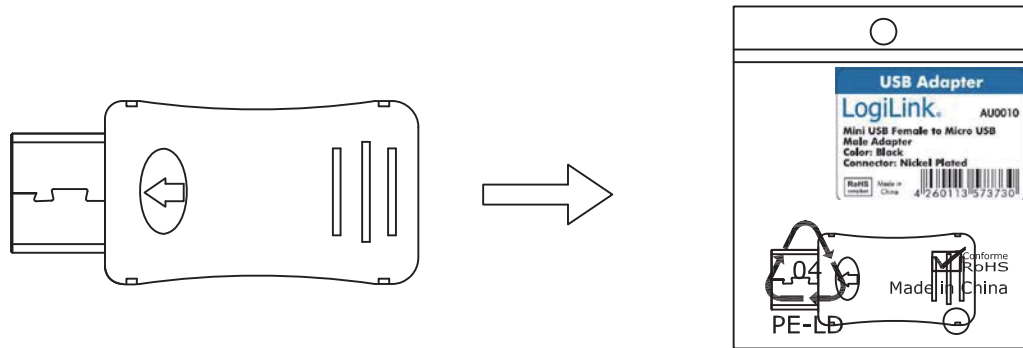


Each PCS installed a zip lock bag


Positive:

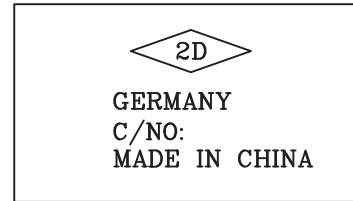

Side:



Lable

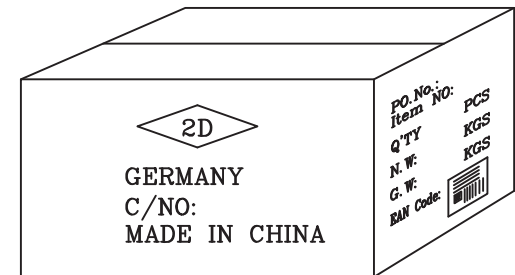

⌀	TOLERANCE		2Direct GmbH		
	INCHES	M/M			
.X	.015	.30	TITLE: Micro USB TO Mini USB 5P Adapter		
.XX	.010	.10			
.XXX	.005	.05			
DRAWN BY			CUSTOMER :		
CHECK BY			CUSTOMER NO.:		AU0010
APPD BY	SCALE	NONE		DRAWING NO.:	REV. A
	UNIT	MM			
	DATE	2010.12.02		CA0010257	2/2